

SQL

Big Data Systems

Dr. Rubi Boim

Motivation (for this course)

SQL is an important “standard”

- Used in RDBMS and most Data Warehouses
- **But NOT in most NoSQL**
 - Each product has its own API
 - BUT some are built on the same building blocks
CQL (Cassandra)
- Joins and normalization are crucial for RDBMS
You should know them well as they are anti-patterns for Wide columns

Reminder - relational model

- Data is stored in tables of columns and rows
- A unique key identifies each row
- The table is unordered (no first / last)

Table / relation

users

Columns / attributes

<u>user id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

Rows / tuples

Structured Query Language

- An “API” for querying and maintaining the database
- Different standards (ANSI SQL, SQL3...)

Can be classified to

- Data Definition Language (DDL)
create / alter / delete tables
- Data Manipulation Language (DML)
select / insert / update /delete data

Data Definition Language (DDL)

create / alter / delete tables

(We present here only the basics - there are a lot more options for each operation)

CREATE TABLE

Creates a new table

```
CREATE TABLE    table(  
    column1 DATATYPE,  
    column2 DATATYPE,  
    column3 DATATYPE,  
    ...)
```

DATATYPES

VARCHAR(n),
INT, SMALLINT, MEDIUMINT, BIGINT,
FLOAT, DOUBLE,
DATE, DATETIME, TIMESTAMP,
BIT

...

CREATE TABLE

```
CREATE TABLE users(  
    user_id INT,  
    name VARCHAR(255) ,  
    city VARCHAR(255) ,  
    birthdate DATE  
)
```

users			
user_id	name	city	brithdate

CREATE TABLE

```
CREATE TABLE users (  
  user_id INT NOT NULL,  
  name VARCHAR(255),  
  city VARCHAR(255),  
  birthdate DATE,  
  PRIMARY KEY (user_id)  
)
```

MySQL syntax

Oracle / SQL Server use inline
(user_id INT NOT NULL PRIMARY KEY)


users

<u>user id</u>	name	city	brithdate

DROP TABLE

Deletes an existing table

DROP TABLE table

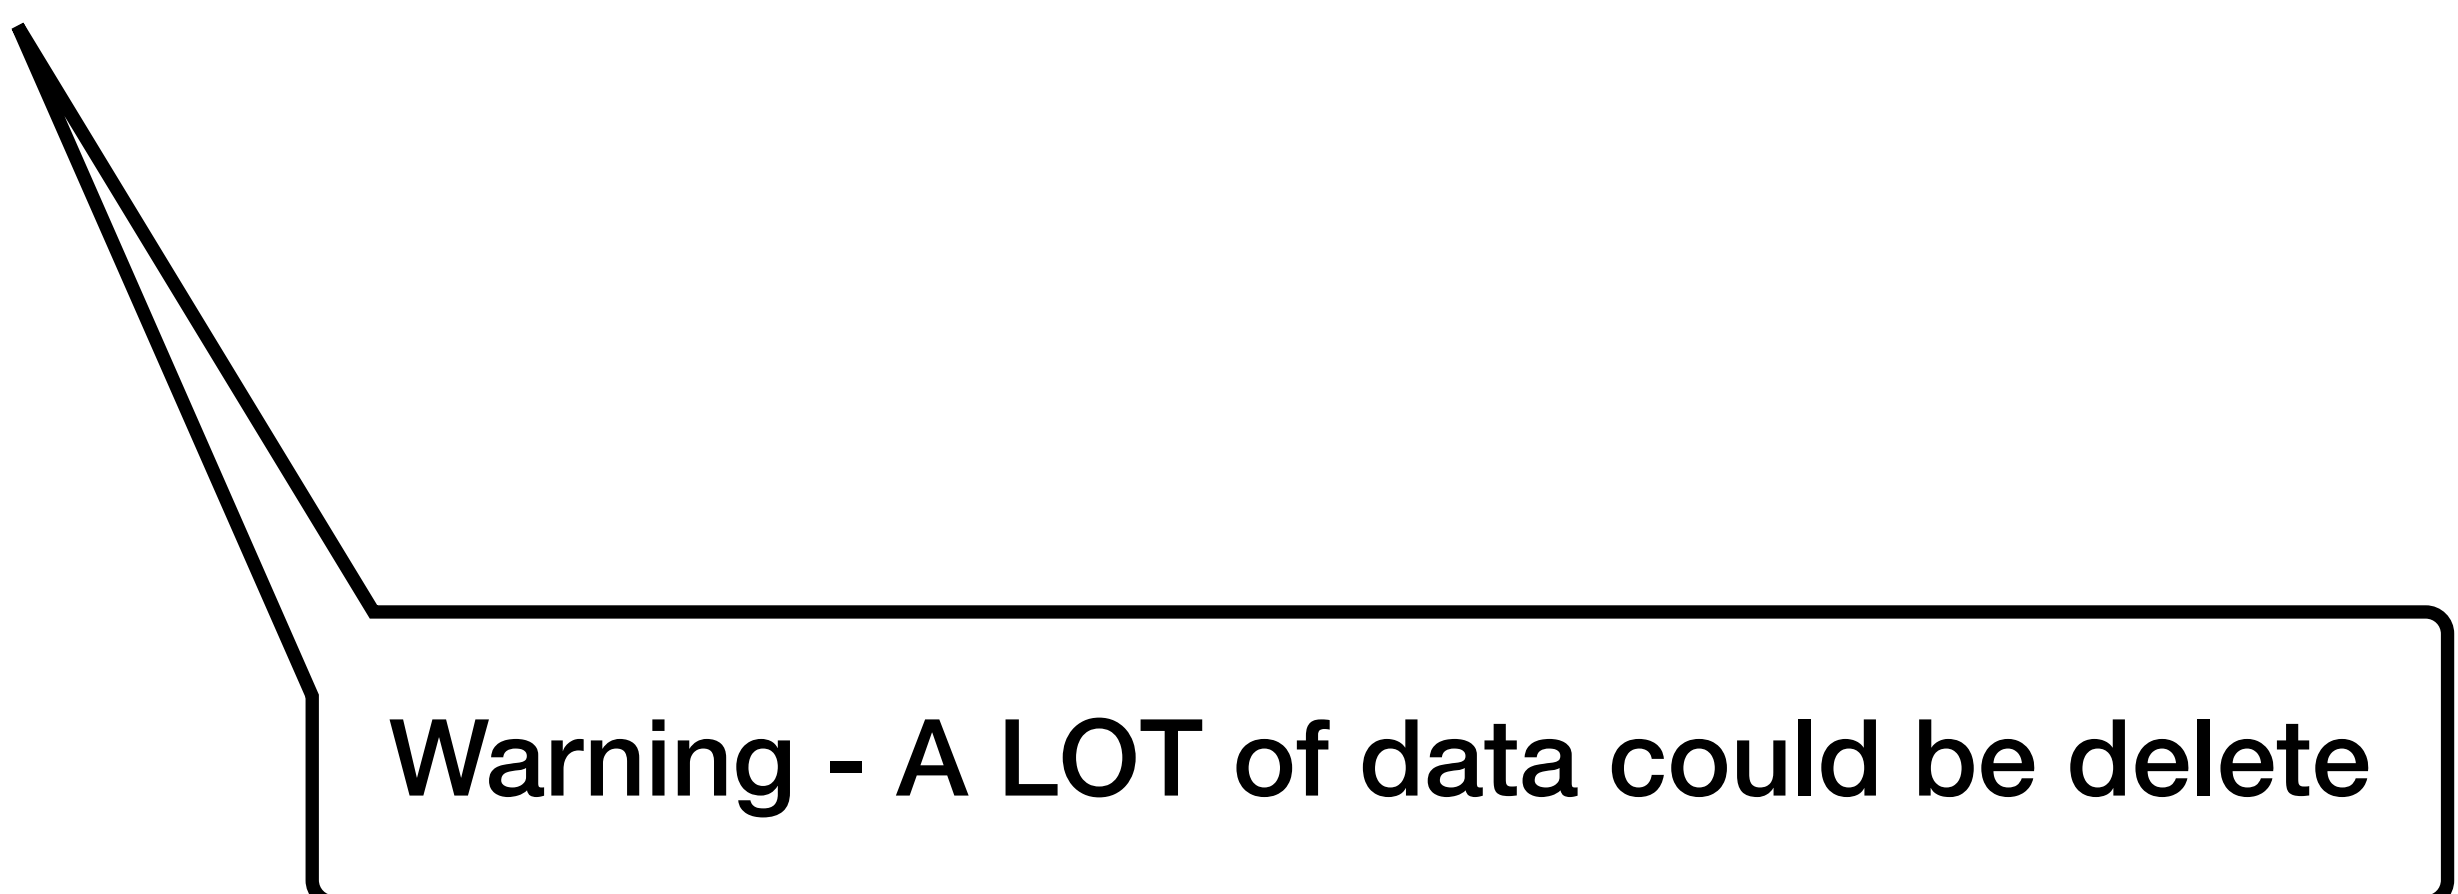

Warning - A LOT of data could be delete

ALTER TABLE

Alters an existing table

```
ALTER TABLE table(  
    ADD column1 DATATYPE,  
    DROP column2,  
    ALTER column3 newName DATATYPE  
)
```

ALTER TABLE

```
CREATE TABLE users(  
  user_id INT,  
  name VARCHAR(255) ,  
  city VARCHAR(255) ,  
  birthdate DATE
```

users

user_id	name	city	brithdate

```
ALTER TABLE users(  
  DROP city)
```

users (after alter)

user_id	name	brithdate

ALTER TABLE

```
CREATE TABLE users(  
  user_id INT,  
  name VARCHAR(255) ,  
  city VARCHAR(255) ,  
  birthdate DATE
```

users

user_id	name	city	brithdate

btw - the data is stored on disk by row or by column?

```
ALTER TABLE users(  
  DROP city)
```

users (after alter)

user_id	name	brithdate

Data Manipulation Language (DML)

select / insert / update /delete data

(We present here only the basics - there are a lot more options for each operation)

SELECT

Retrieves data from the database

SELECT	attributes
FROM	tables
WHERE	conditions
ORDER BY	attributes

SELECT

Retrieves data from the database

SELECT	attributes
FROM	tables
WHERE	conditions
ORDER BY	attributes



If we do not use “order by”, can we get different results or different order if we run the same query twice?

SELECT

Retrieves data from the database

SELECT	attributes
FROM	tables
WHERE	conditions
ORDER BY	at

Yes - because of the query optimizer

If we do not use “order by”, can we get different results or different order if we run the same query twice?

SELECT

Return all users in
a descending order

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

SELECT

Return all users in
a descending order

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963


descending by what? which attributes to return?

SELECT

Return all users in
a descending order

```
SELECT *  
FROM users  
ORDER BY name DESC
```

users			
user_id	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963



user_id	name	city	brithdate
102	Tova Milo	Tel Aviv	<null>
101	Rubi Boim	Tel Aviv	<null>
104	Michael Jordan	Chicago	17/02/1963
103	Lebron James	Los Angeles	30/12/1984

SELECT

Return the ids and names
of all Tel Aviv residences

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963


SELECT

Return the ids and names
of all Tel Aviv residences

```
SELECT user_id, name
FROM users
WHERE city = "Tel Aviv"
ORDER BY name
```

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

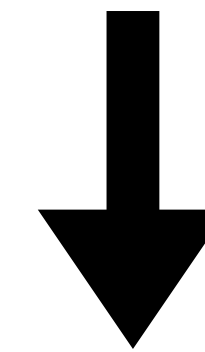

<u>user_id</u>	name
101	Rubi Boim
102	Tova Milo

SELECT

Return the ids, names
and birthdates of all who
were born post 1980

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963


SELECT

Return the ids, names
and birthdates of all who
were born post 1980

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
SELECT user_id, name, birthdate
FROM users
WHERE birthdate >= '01/01/1980'
ORDER BY name
```

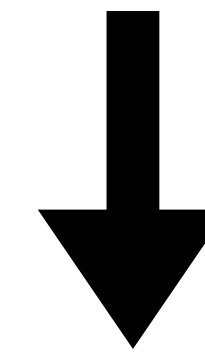

user_id	name	brithdate
103	Lebron James	30/12/1984

note - different db vendors use different dates format (' / # / ...)

SELECT

Select all cities

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963


SELECT

Select all cities

```
SELECT city
FROM users
ORDER BY city
```

users

user_id	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963



city
Chicago
Los Angeles
Tel Aviv
Tel Aviv

SELECT


Select all cities

```
SELECT DISTINCT city
FROM users
ORDER BY city
```

Note trivial to implement.
Might not be available in Big Data DBs

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963




city
Chicago
Los Angeles
Tel Aviv

SELECT

Select all cities

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
SELECT DISTINCT city, user_id
FROM users
ORDER BY city
```

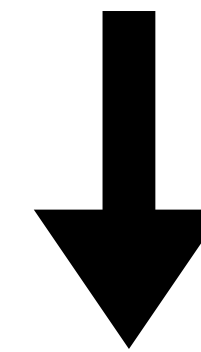

?


SELECT

Select all cities

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
SELECT DISTINCT city, user_id
FROM users
ORDER BY city
```

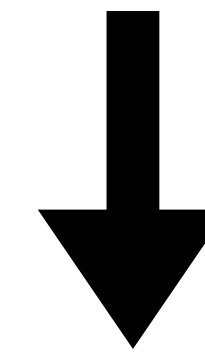


city	user_id
Chicago	104
Los Angeles	103
Tel Aviv	101
Tel Aviv	102

SELECT

Select all cities

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
SELECT DISTINCT city, birthdate
FROM users
ORDER BY city
```

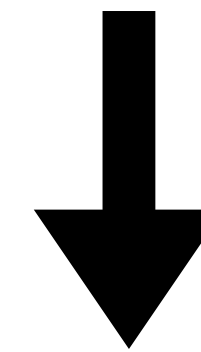


?

SELECT

Select all cities

users			
<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

SELECT DISTINCT city, birthdate
FROM users
ORDER BY city



city	birthdate
Chicago	17/02/1963
Los Angeles	30/12/1984
Tel Aviv	<null>
Tel Aviv	<null>


SELECT

Select all cities

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
SELECT DISTINCT city, birthdate
FROM users
ORDER BY city
```



city	birthdate
Chicago	17/02/1963
Los Angeles	30/12/1984
Tel Aviv	<null>

SELECT with Joins

- What is the connection between the tables?

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

cities

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

SELECT with Joins

- Select all users who lives in “small” cities (<1m)

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael	Chicago	17/02/1963

cities

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

SELECT with Joins

- Select all users who lives in “small” cities (<1m)

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael	Chicago	17/02/1963

cities

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

SELECT with Joins

- Select all users who lives in “small” cities (<1m)


users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael	Chicago	17/02/1963

cities

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT users.*
FROM users, cities
WHERE users.city = cities.name AND
      cities.population < 1000000
```

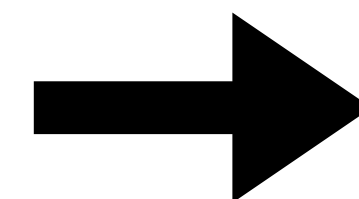

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>

SELECT with Joins

- Select all users who lives in “small” cities (<1m)

users


<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael	Chicago	17/02/1963

cities

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT users.*  
FROM users, cities  
WHERE users.city = cities.name AND  
       cities.population < 1000000
```

What will happen if a city exists in users, but not in cities?

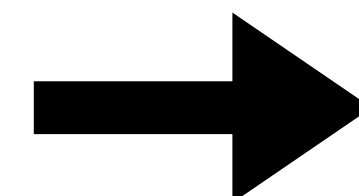

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>

SELECT with Joins

-

The user won't be returned by the query.


Note - if you define the DB “correctly”, such a scenario should not happen as the DB won't allow you to add a user without a valid city (more on this on “relational-data-integrity.pdf”)

user_id
101
102
103
104

name

```
SELECT  
FROM  
WHERE users.city = cities.name AND  
cities.population < 1000000
```

cities?



user_id	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>

SELECT with Joins


- Find all users who lives in “small” cities (<1m) in Europe

```
users(user_id, name, city, birthdate)
cities(name, country, population)
countries(name, region, population)
```


SELECT with Joins

- Find all users who lives in “small” cities (<1m) in Europe

```
users(user_id, name, city, birthdate)
cities(name, country, population)
countries(name, region, population)
```



```
SELECT users.*
FROM   users, cities, countries
WHERE  users.city = cities.name AND
       cities.population < 1000000 AND
       cities.country = countries.name AND
       countries.region = "Europe"
```

SELECT with Joins

- find all 2nd degree friends of Lebron (103)

`users(user_id, name, city, birthdate)`

`cities(name, country, population)`

`countries(name, region, population)`

`friends(user_id, friend user_id, since_date)`

SELECT with Joins


- find all 2nd degree friends of Lebron (103)

`users(user_id, name, city, birthdate)`

`cities(name, country, population)`

`countries(name, region, population)`

`friends(user_id, friend user_id, since_date)`



```
SELECT DISTINCT user_id
FROM friends
WHERE friend_user_id IN
      (SELECT user_id
       FROM friends WHERE friend_user_id = 103)
```

SELECT with Joins


- find all 2nd degree friends of Lebron (103)

`users(user_id, name, city, birthdate)`

`cities(name, country, population)`

`countries(name, region, population)`

`friends(user_id, friend_user_id, since_date)`



```
SELECT DISTINCT user_id
FROM friends
WHERE friend_user_id IN
      (SELECT user_id
       FROM friends WHERE friend_user_id = 103)
```

What about first degree friends?

SELECT with Joins

- find all 2nd degree friends of Lebron (103)


users(user_id, name, city, birthdate)

cities(name, country, population)

countries(name, region, population)

friends(user_id, friend user_id, since_date)

```
SELECT DISTINCT user_id
FROM friends
WHERE friend_user_id IN
    (SELECT user_id FROM friends
     WHERE friend_user_id = 103)
AND user_id NOT IN
    (SELECT user_id FROM friends
     WHERE friend_user_id = 103)
```



SELECT with Joins

- find all 2nd degree friends of Lebron (103)


users(user_id, name, city, birthdate)

cities(name, country, population)

countries(name, region, population)

friends(user_id, friend user_id, since_date)

```
SELECT DISTINCT user_id
FROM friends
WHERE friend_user_id IN
      (SELECT user_id FROM friends
       WHERE friend_user_id = 103)
AND user_id NOT IN
      (SELECT user_id FROM friends
       WHERE friend_user_id = 103)
```



What about Lebron?

SELECT with Joins

- find all 2nd degree friends of Lebron (103)


users(user_id, name, city, birthdate)

cities(name, country, population)

countries(name, region, population)

friends(user_id, friend user_id, since_date)

```
SELECT DISTINCT user_id
FROM friends
WHERE friend_user_id IN
    (SELECT user_id FROM friends
     WHERE friend_user_id = 103)
AND user_id NOT IN
    (SELECT user_id FROM friends
     WHERE friend_user_id = 103)
AND user_id <> 103
```



SELECT logic - Cartesian product

items

<u>item_id</u>	title	company_id
2003	iPad	1
2004	iPhone	1
2005	55' LED TV	2

companies

<u>id</u>	title
1	Apple
2	Samsung

```
SELECT * FROM items, companies
```


SELECT logic - Cartesian product

items

item_id	title	company_id
2003	iPad	1
2004	iPhone	1
2005	55' LED TV	2

companies

id	title
1	Apple
2	Samsung

SELECT * FROM items, companies

item_id	title	company_id	id	title
2003	iPad	1	1	Apple
2003	iPad	1	2	Samsung
2004	iPhone	1	1	Apple
2004	iPhone	1	2	Samsung
2005	55' LED TV	2	1	Apple
2005	55' LED TV	2	2	Samsung

SELECT logic - Cartesian product

items

item_id	title	company_id
2003	iPad	1
2004	iPhone	1
2005	55' LED TV	2

companies

id	title
1	Apple
2	Samsung

SELECT * FROM items, companies
WHERE company_id = id

item_id	title	company_id	id	title
2003	iPad	1	1	Apple
2003	iPad	1	2	Samsung
2004	iPhone	1	1	Apple
2004	iPhone	1	2	Samsung
2005	55' LED TV	2	1	Apple
2005	55' LED TV	2	2	Samsung

SELECT logic - Cartesian product

items

<u>item_id</u>	title	company_id
2003	iPad	1
2004	iPhone	1
2005	55' LED TV	2

companies

<u>id</u>	title
1	Apple
2	Samsung

```
SELECT * FROM items, companies
WHERE company_id = id
```

item_id	title	company_id	id	title
2003	iPad	1	1	Apple
2004	iPhone	1	1	Apple
2005	55' LED TV	2	2	Samsung

INSERT / UPDATE / DELETE

(We present here only the basics - there are a lot more options for each operation)

INSERT

Insert data to the database

```
INSERT INTO table (A1 , ... , An)  
VALUES          (V1 , ... , Vn)
```

- Without attributes all values are required in order
- Missing attributes will be added as NULL

INSERT

```
INSERT INTO users(user_id, name, city)
VALUES (101, 'Rubi Boim', 'Tel Aviv')
```

```
INSERT INTO users
VALUES (103, 'Lebron James', 'Los Angeles', '30/12/1984')
```

users

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984

DELETE

Deletes data from the database

```
DELETE FROM table
WHERE      conditions
```

Warnings

- double check the **conditions**
- If no conditions are set, **ALL DATA will be deleted**

DELETE


<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
DELETE FROM users WHERE user_id = 104
DELETE FROM users WHERE city = 'Tel Aviv'
```


DELETE

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
DELETE FROM users WHERE user_id = 104  
DELETE FROM users WHERE city = 'Tel Aviv'
```



<u>user_id</u>	name	city	brithdate
103	Lebron James	Los Angeles	30/12/1984

UPDATE

Update data in the database

```
UPDATE table
SET      attr1 = <value>,
         attr1 = <value>
WHERE    conditions
```

Warnings

- double check the **conditions**
- If no conditions are set, **ALL DATA will be updated**

UPDATE


<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
UPDATE users SET city = 'Tel-Aviv'  
WHERE city = 'Tel Aviv'
```

UPDATE

<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel Aviv	<null>
102	Tova Milo	Tel Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

```
UPDATE users SET city = 'Tel-Aviv'  
WHERE city = 'Tel Aviv'
```



<u>user_id</u>	name	city	brithdate
101	Rubi Boim	Tel-Aviv	<null>
102	Tova Milo	Tel-Aviv	<null>
103	Lebron James	Los Angeles	30/12/1984
104	Michael Jordan	Chicago	17/02/1963

Aggregation / Grouping / Union / Subqueries

Aggregation

Aggregates the rows and calculate a function

```
SELECT AVG(attr)
FROM table
WHERE conditions
```

Popular operations

- COUNT, AVG, SUM, MIN, MAX

Aggregation

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000


**What is the average
population of all cities?**

Aggregation

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

What is the average
population of all cities?

```
SELECT avg(population)  
FROM cities
```




avg(population)
2,387,500

Aggregation

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

What is the average
population of all cities?

```
SELECT avg(population)
FROM cities
```



avg(population)
2,387,500


How many “big cities”
(>1m) are in the DB?

Aggregation

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

What is the average
population of all cities?


```
SELECT avg(population)
FROM cities
```



avg(population)
2,387,500

How many “big cities”
(>1m) are in the DB?

```
SELECT count(*)
FROM cities
WHERE population > 1000000
```



count(*)
3

GROUP BY

Aggregates on specific attributes

```
SELECT    attributes
FROM      table
WHERE     conditions
GROUP BY  attributes
HAVING    aggregates
```

- SELECT contains only aggregate / group by attributes
- GROUP BY is performed after the WHERE
- HAVING contains only aggregate attributes and performed finally

GROUP BY

**For each country,
how many cities are in
the DB?**


<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

GROUP BY

For each country,
how many cities are in
the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
GROUP BY country
```



country	count(*)
Israel	1
France	1
USA	2

GROUP BY

What is the average population of all cities per country?


<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

GROUP BY

What is the average
population of all cities
per country?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, avg(population)
FROM cities
GROUP BY country
```



country	avg(population)
Israel	450,000
USA	3,500,000
France	2,100,000

GROUP BY

Which are the countries
with exactly 1 city in the
DB?


<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

GROUP BY

Which are the countries
with exactly 1 city in the
DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
GROUP BY country  
HAVING count(*) = 1
```



country	count(*)
Israel	1
France	1

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?


<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
WHERE population > 1000000  
GROUP BY country
```




country	count(*)
Israel	0
USA	2
France	1

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
WHERE population > 1000000  
GROUP BY country
```



country	count(*)
Israel	0
USA	2
France	1


What is the problem here?

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
WHERE population > 1000000  
GROUP BY country
```




country	count(*)
USA	2
France	1

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
WHERE population > 1000000  
GROUP BY country
```



country	count(*)
USA	2
France	1


HW - how to return the query
with <Israel,0>?

GROUP BY

For each country,
how many “big cities”
(>1m) are in the DB?

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

```
SELECT country, count(*)  
FROM cities  
WHERE population > 1000000  
GROUP BY country
```



country	count(*)
USA	2
France	1

HW - how to return the query
with <Israel,0>?

Hint: search for “left join”

UNION, INTERSECTION, DIFFERENCE

```
SELECT name
FROM cities
WHERE country = 'USA'
```

UNION

```
SELECT name
FROM cities
WHERE country <> 'USA' AND
      population < 1000000
```

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000



?

- Attribute names must be the same (use “AS”)


UNION, INTERSECTION, DIFFERENCE

```
SELECT name
FROM cities
WHERE country = 'USA'
```

UNION

```
SELECT name
FROM cities
WHERE country <> 'USA' AND
      population < 1000000
```

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000



name
Tel Aviv
Chicago
Los Angeles

- Attribute names must be the same (use “AS”)

Subqueries

Which cities has a lower population than all the cities in USA?


<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000

Subqueries

Which cities has a lower population than all the cities in USA?

```
SELECT name
FROM cities
WHERE population < ALL
  (SELECT population
   FROM cities
   WHERE country = 'USA' )
```

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000




name
Tel Aviv
Paris

Subqueries

Which cities has a lower population than all the cities in USA?

```
SELECT name
FROM cities
WHERE population < ALL
  (SELECT population
   FROM cities
   WHERE country = 'USA')
```

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000



name
Tel Aviv
Paris


Can you think of another version?

Subqueries

Which cities has a lower population than all the cities in USA?

```
SELECT name
FROM cities
WHERE population <
  (SELECT min(population)
   FROM cities
   WHERE country = 'USA')
```

<u>name</u>	country	population
Tel Aviv	Israel	450,000
Chicago	USA	3,000,000
Paris	France	2,100,000
Los Angeles	USA	4,000,000



name
Tel Aviv
Paris

Quick questions

Question (1)

Find all action movies

`users(id, name, city, birthdate)`


`movies(id, name, rating, genre)`

`views(user id, movie id, view_timestamp)`

Question (1)

Find all action movies

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(user id, movie id, view_timestamp)
```

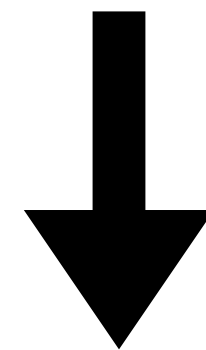

```
SELECT movies.*
FROM   movies
WHERE  genre = 'action'
```


Question (2)

Find all action movies viewed by Lebron (id = 103)

`users(id, name, city, birthdate)`


`movies(id, name, rating, genre)`

`views(user id, movie id, view_timestamp)`

Question (2)

Find all action movies viewed by Lebron (id = 103)

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(user_id, movie_id, view_timestamp)
```




```
SELECT movies.*
FROM   views, movies
WHERE  views.user_id = 103 AND
       views.movie_id = movies.id AND
       movies.genre = 'action'
```


Question (2)

Find all action movies viewed by Lebron (id = 103)

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(user_id, movie_id, view_timestamp)
```

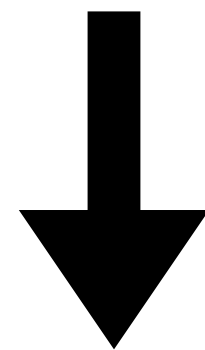

```
SELECT movies.*
FROM   views, movies
WHERE  views.user_id = 103 AND
       views.movie_id = movies.id AND
       movies.genre = 'action'
```

Do we need DISTINCT?

Question (3)

Find all action movies viewed by Lebron (id = 103)

`users(id, name, city, birthdate)`

`movies(id, name, rating, genre)`

`views(view_id, user_id, movie_id, view_timestamp)`




What is the difference?

Question (3)

Find all action movies viewed by Lebron (id = 103)

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(view_id, user_id, movie_id, view_timestamp)
```

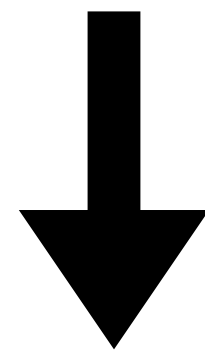

```
SELECT DISTINCT movies.*
FROM   views, movies
WHERE  views.user_id = 103 AND
       views.movie_id = movies.id AND
       movies.genre = 'action'
```



Question (4)

“people who watched American pie (id = 23) also watched”

`users(id, name, city, birthdate)`

`movies(id, name, rating, genre)`

`views(view_id, user_id, movie_id, view_timestamp)`

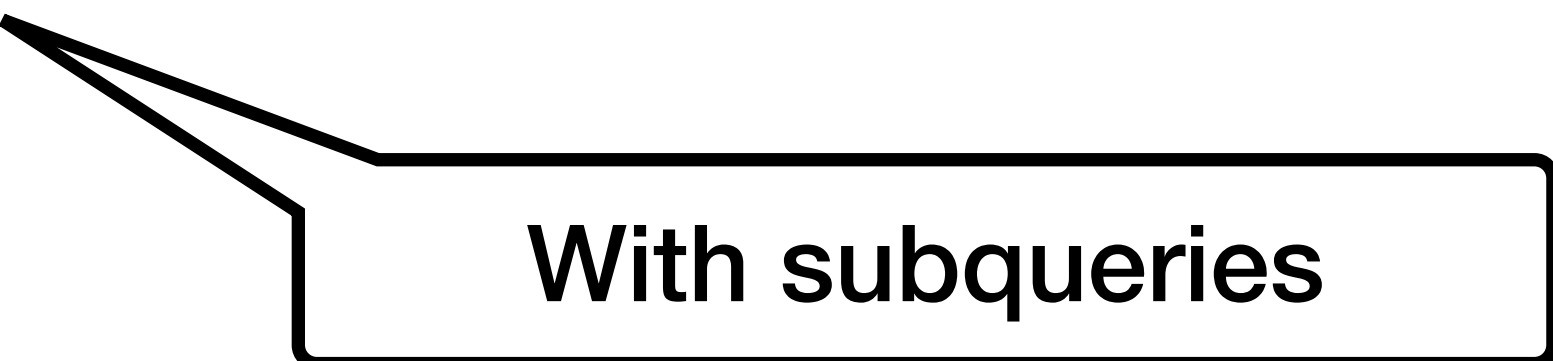

With subqueries


Question (4)

“people who watched American pie (id = 23) also watched”

users(id, name, city, birthdate)

movies(id, name, rating, genre)

views(view_id, user_id, movie_id, view_timestamp)

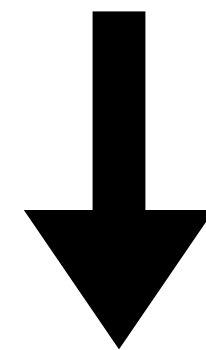

With subqueries

```
SELECT *  
FROM movies  
WHERE id <> 23 AND  
      id IN  
      (SELECT movie_id FROM views WHERE user_id IN  
        (SELECT user_id FROM views WHERE movie_id = 23)  
      )
```


Question (4)

“people who watched American pie (id = 23) also watched”

users(id, name, city, birthdate)

movies(id, name, rating, genre)

views(view_id, user_id, movie_id, view_timestamp)

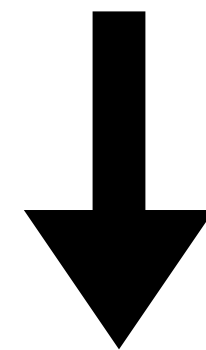

```
SELECT DISTINCT m.*  
FROM   movies AS m, views AS v1  
WHERE  m.id = v1.movie_id AND  
       m.id <> 23 AND  
       v1.user_id IN  
         (SELECT user_id FROM views WHERE movie_id = 23)
```

Another version (1)


Question (4)

“people who watched American pie (id = 23) also watched”

users(id, name, city, birthdate)

movies(id, name, rating, genre)

views(view_id, user_id, movie_id, view_timestamp)

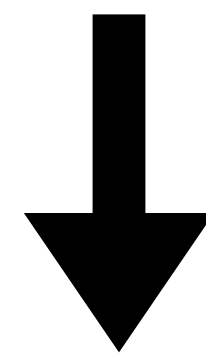

```
SELECT DISTINCT m.*
FROM   movies AS m, views AS v1, views AS v2
WHERE  m.id = v1.movie_id AND
       m.id <> 23 AND
       v1.user_id = v2.user_id AND
       v2.movie_id = 23
```

Another version (2)

Question (5)

“people who watched American pie (id = 23) also watched”
(ordered by weekly popularity)

```
users(id, name, city, birthdate)
```


```
movies(id, name, rating, genre)
```

```
views(view_id, user_id, movie_id, view_timestamp)
```


Question (5)

“people who watched American pie (id = 23) also watched”
(ordered by weekly popularity)

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(view_id, user_id, movie_id, view_timestamp)
```

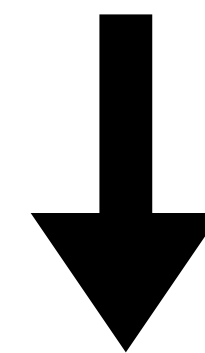


```
SELECT m.id, m.name, count(*)
FROM   movies AS m, views AS v
WHERE  m.id = v.movie_id AND
       v.timestamp > 123456789 AND
       m.id IN (<QUESTION4>)
GROUP BY m.id, m.name
ORDER BY count(*) DESC
```

Question (5)

“people who watched American pie (id = 23) also watched”
(ordered by weekly popularity)

```
users(id, name, city, birthdate)
movies(id, name, rating, genre)
views(view_id, user_id, movie_id, view_timestamp)
```

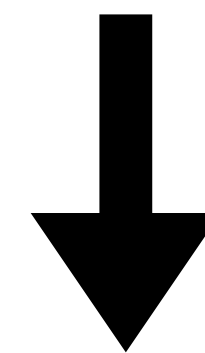

```
SELECT m.id, m.name, count(*)
FROM   movies AS m, views AS v
WHERE  m.id = v.movie_id AND
       v.timestamp > 123456789 AND
       m.id IN (<QUESTION4>)
GROUP BY m.id, m.name
ORDER BY count(*) DESC
```

We just need to update q4 to return
just the ID and not *