

Data Modeling in NoSQL (C*) - Examples

Big Data Systems

Dr. Rubi Boim

Motivation (for this course)

- Learn modeling techniques by examples
- In real life you will blend strategies from each

Use cases

- Shopping cart
- Sensor data
- Gmail
- Instagram

Shopping cart

Requirements

- Customers can add items from a catalog
- Fast read performance

Shopping cart

shoppingcart		
user_id	BIGINT	K
item_id	BIGINT	▼
count	INT	
time_added	TIMESTAMP	
title	TEXT	
cost	DOUBLE	

items		
item_id	BIGINT	K
title	TEXT	
cost	DOUBLE	
inventory_count	INT	

Shopping cart

shoppingcart		
user_id	BIGINT	K
item_id	BIGINT	▼
count	INT	
time_added	TIMESTAMP	
title	TEXT	
cost	DOUBLE	

items		
item_id	BIGINT	K
title	TEXT	
cost	DOUBLE	
inventory_count	INT	

Denormalization for read speed (without joins)

Sensor data (time series)

Requirements

- Sensors can write different measures per second
- Write heavy (1m+ writes per second)

Sensor data (time series) - option 1

sensordata		
date	DATE	K
ts	TIMESTAMP	▼
serial_number	TEXT	▼
type	TEXT	▼
value	TEXT	

Sensor data (time series) - option 1

sensordata		
date	DATE	K
ts	TIMESTAMP	▼
serial_number	TEXT	▼
type	TEXT	▼
value	TEXT	

If the number of sensors will grow we will have a problem

Sensor data (time series) - option 2

sensordata		
date	DATE	K
serial_number	TEXT	K
ts	TIMESTAMP	▼
type	TEXT	▼
value	TEXT	

Sensor data (time series) - option 2

sensordata		
date	DATE	K
serial_number	TEXT	K
ts	TIMESTAMP	▼
type	TEXT	▼
value	TEXT	

Data is always added after the previous data

- SSTable compactions can be optimized
You can change the compaction strategies


Gmail

Requirements


- Manage emails by labels
- Support attachments

*example


Gmail

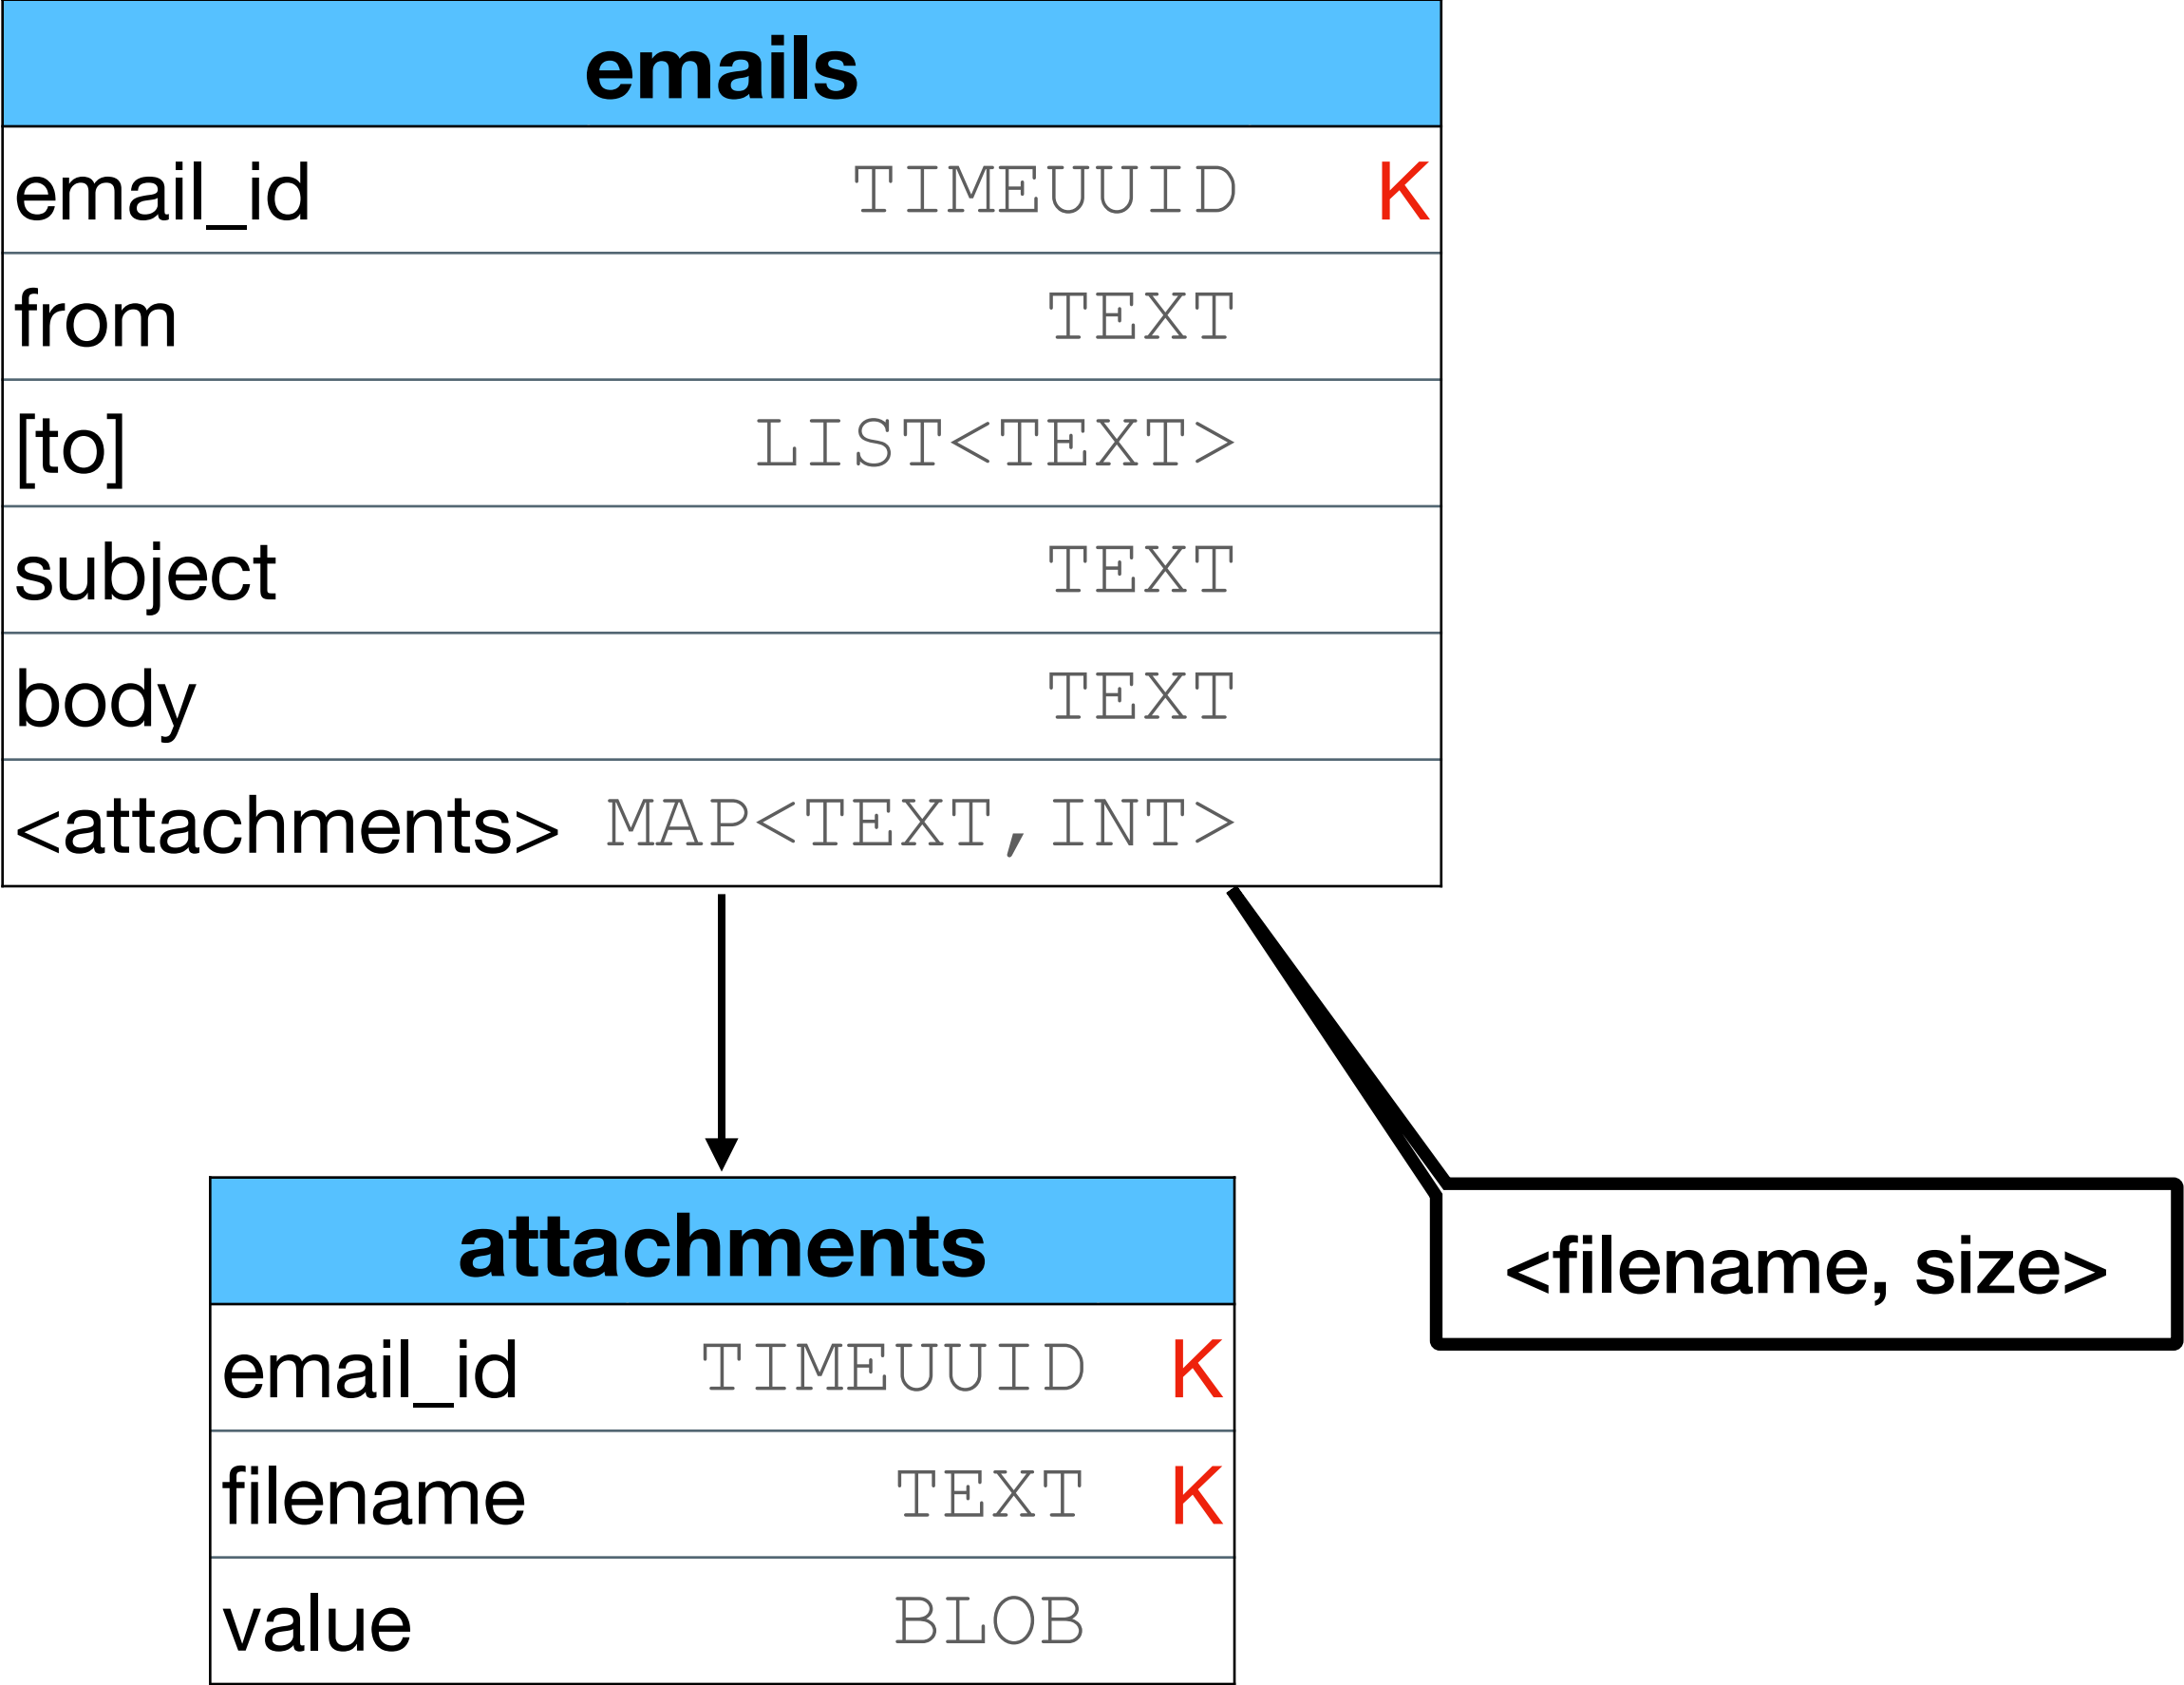


Gmail

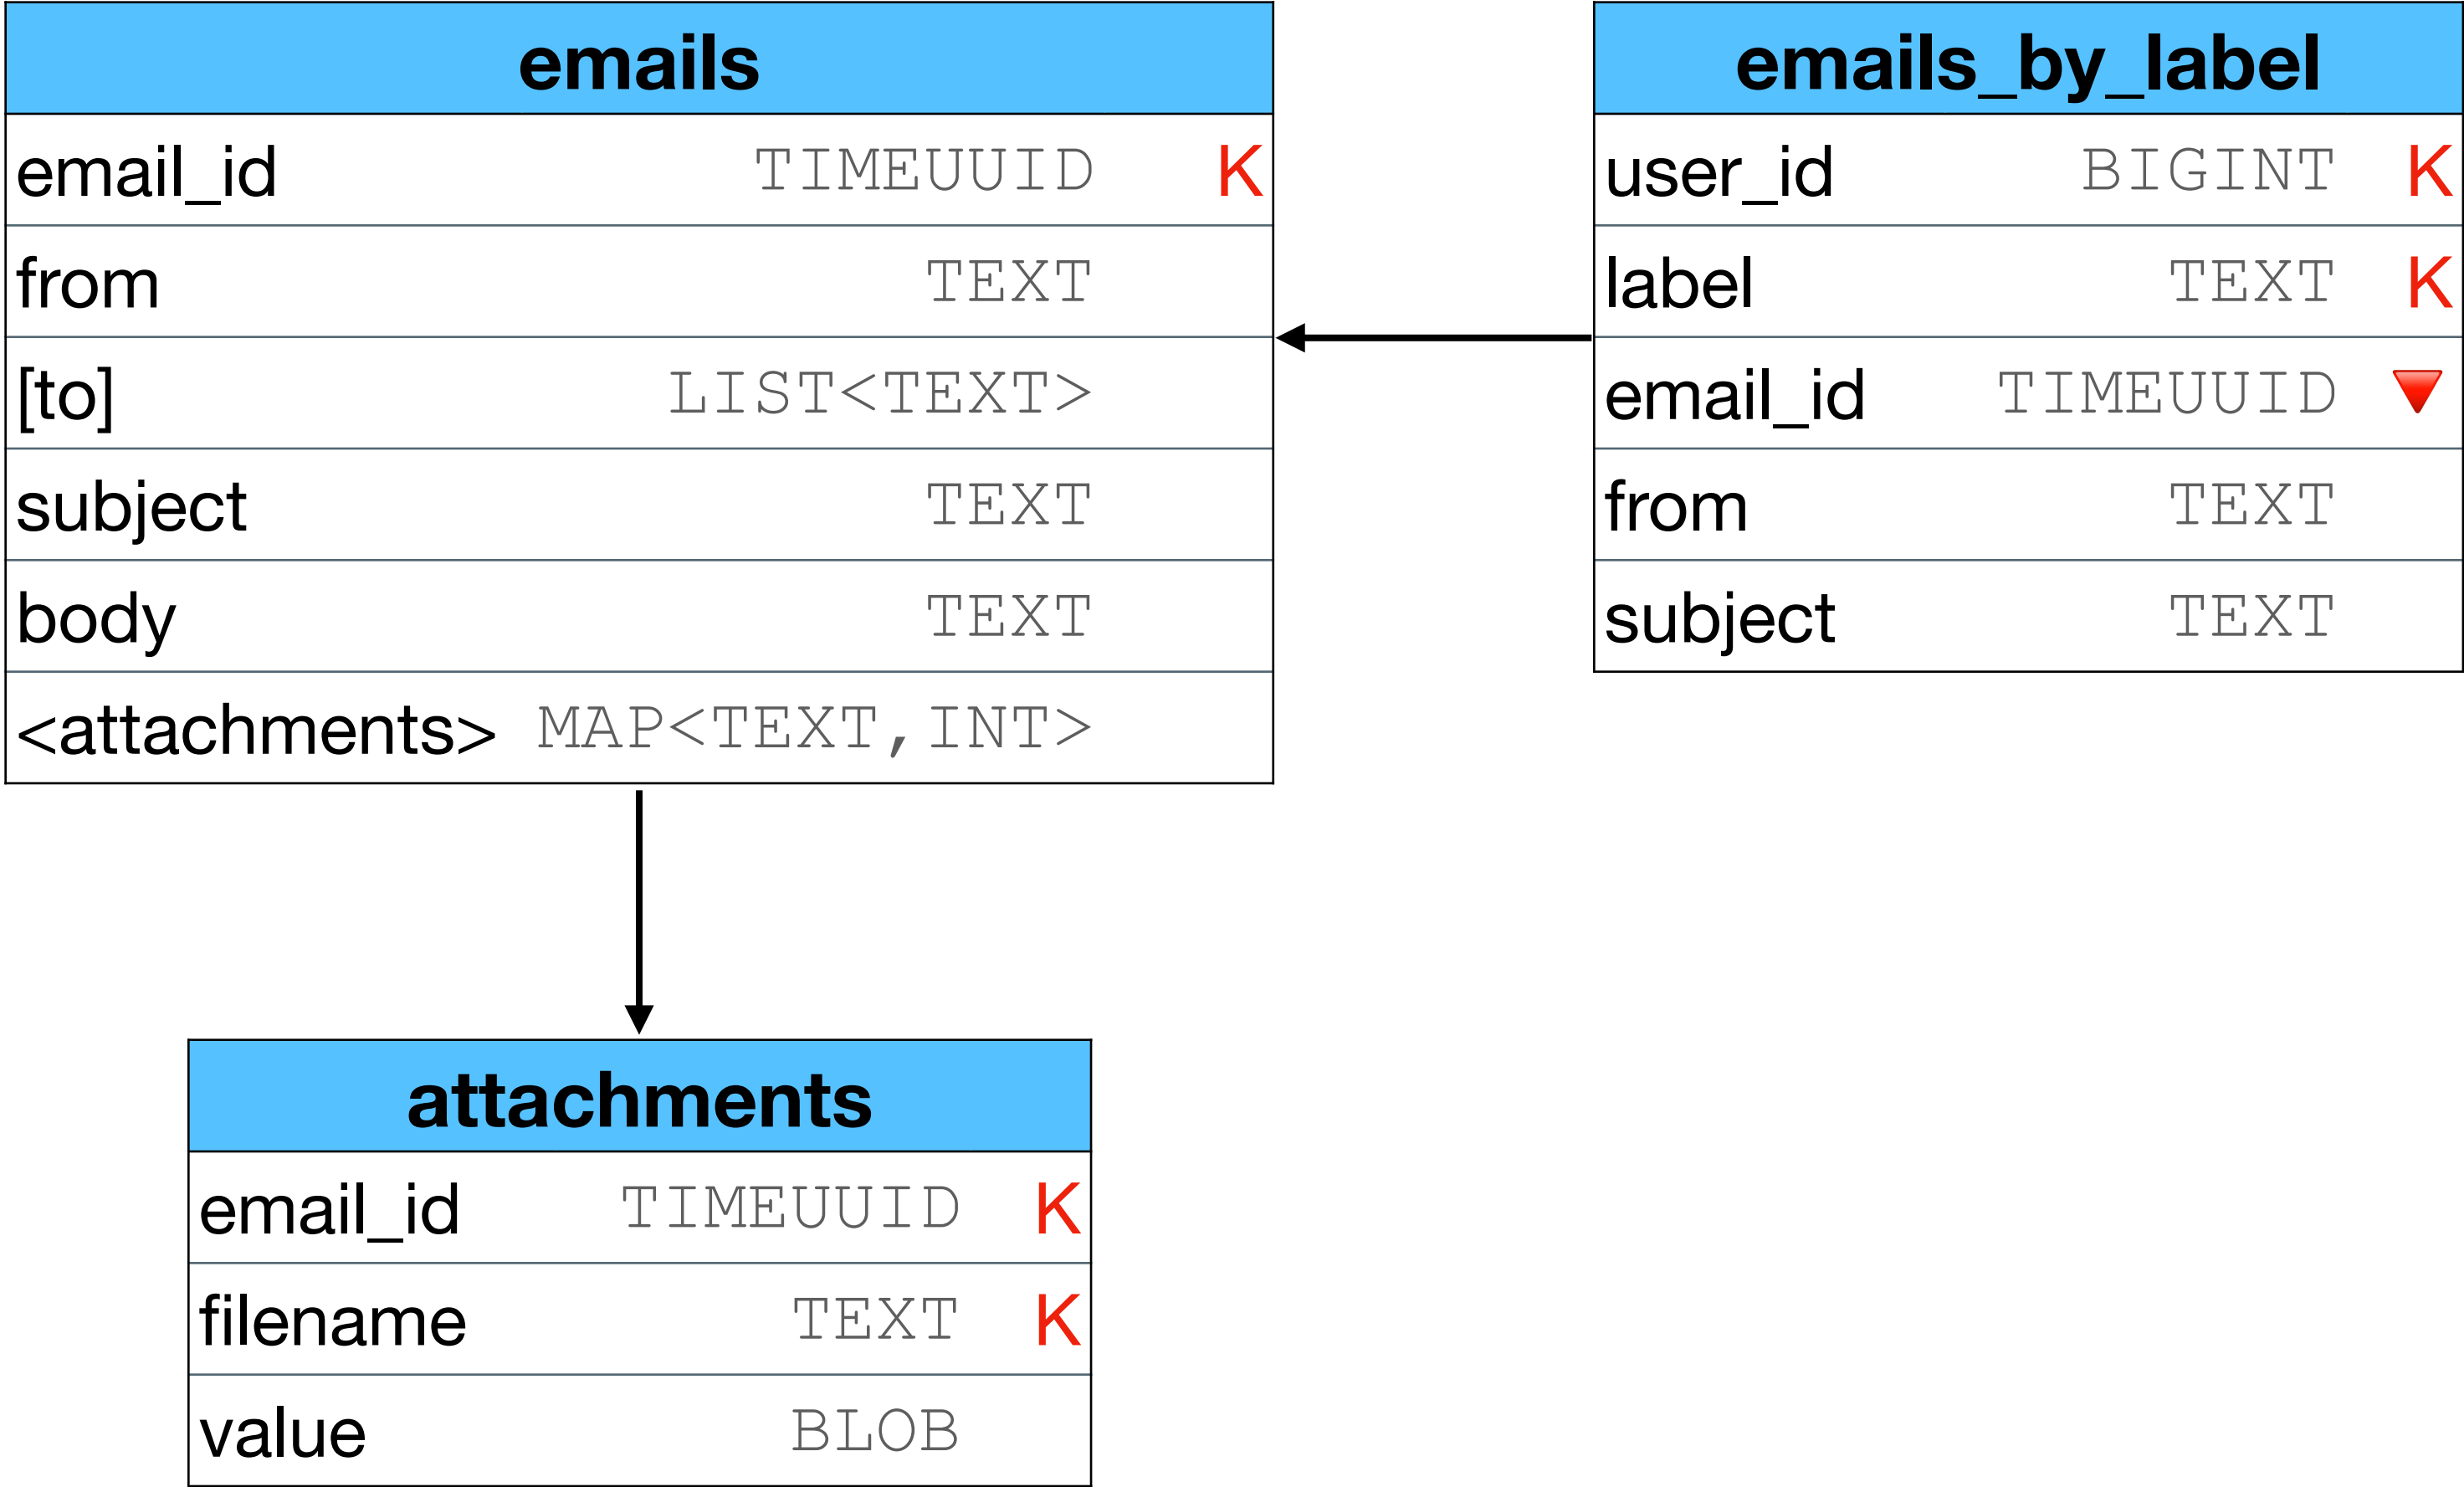


Gmail

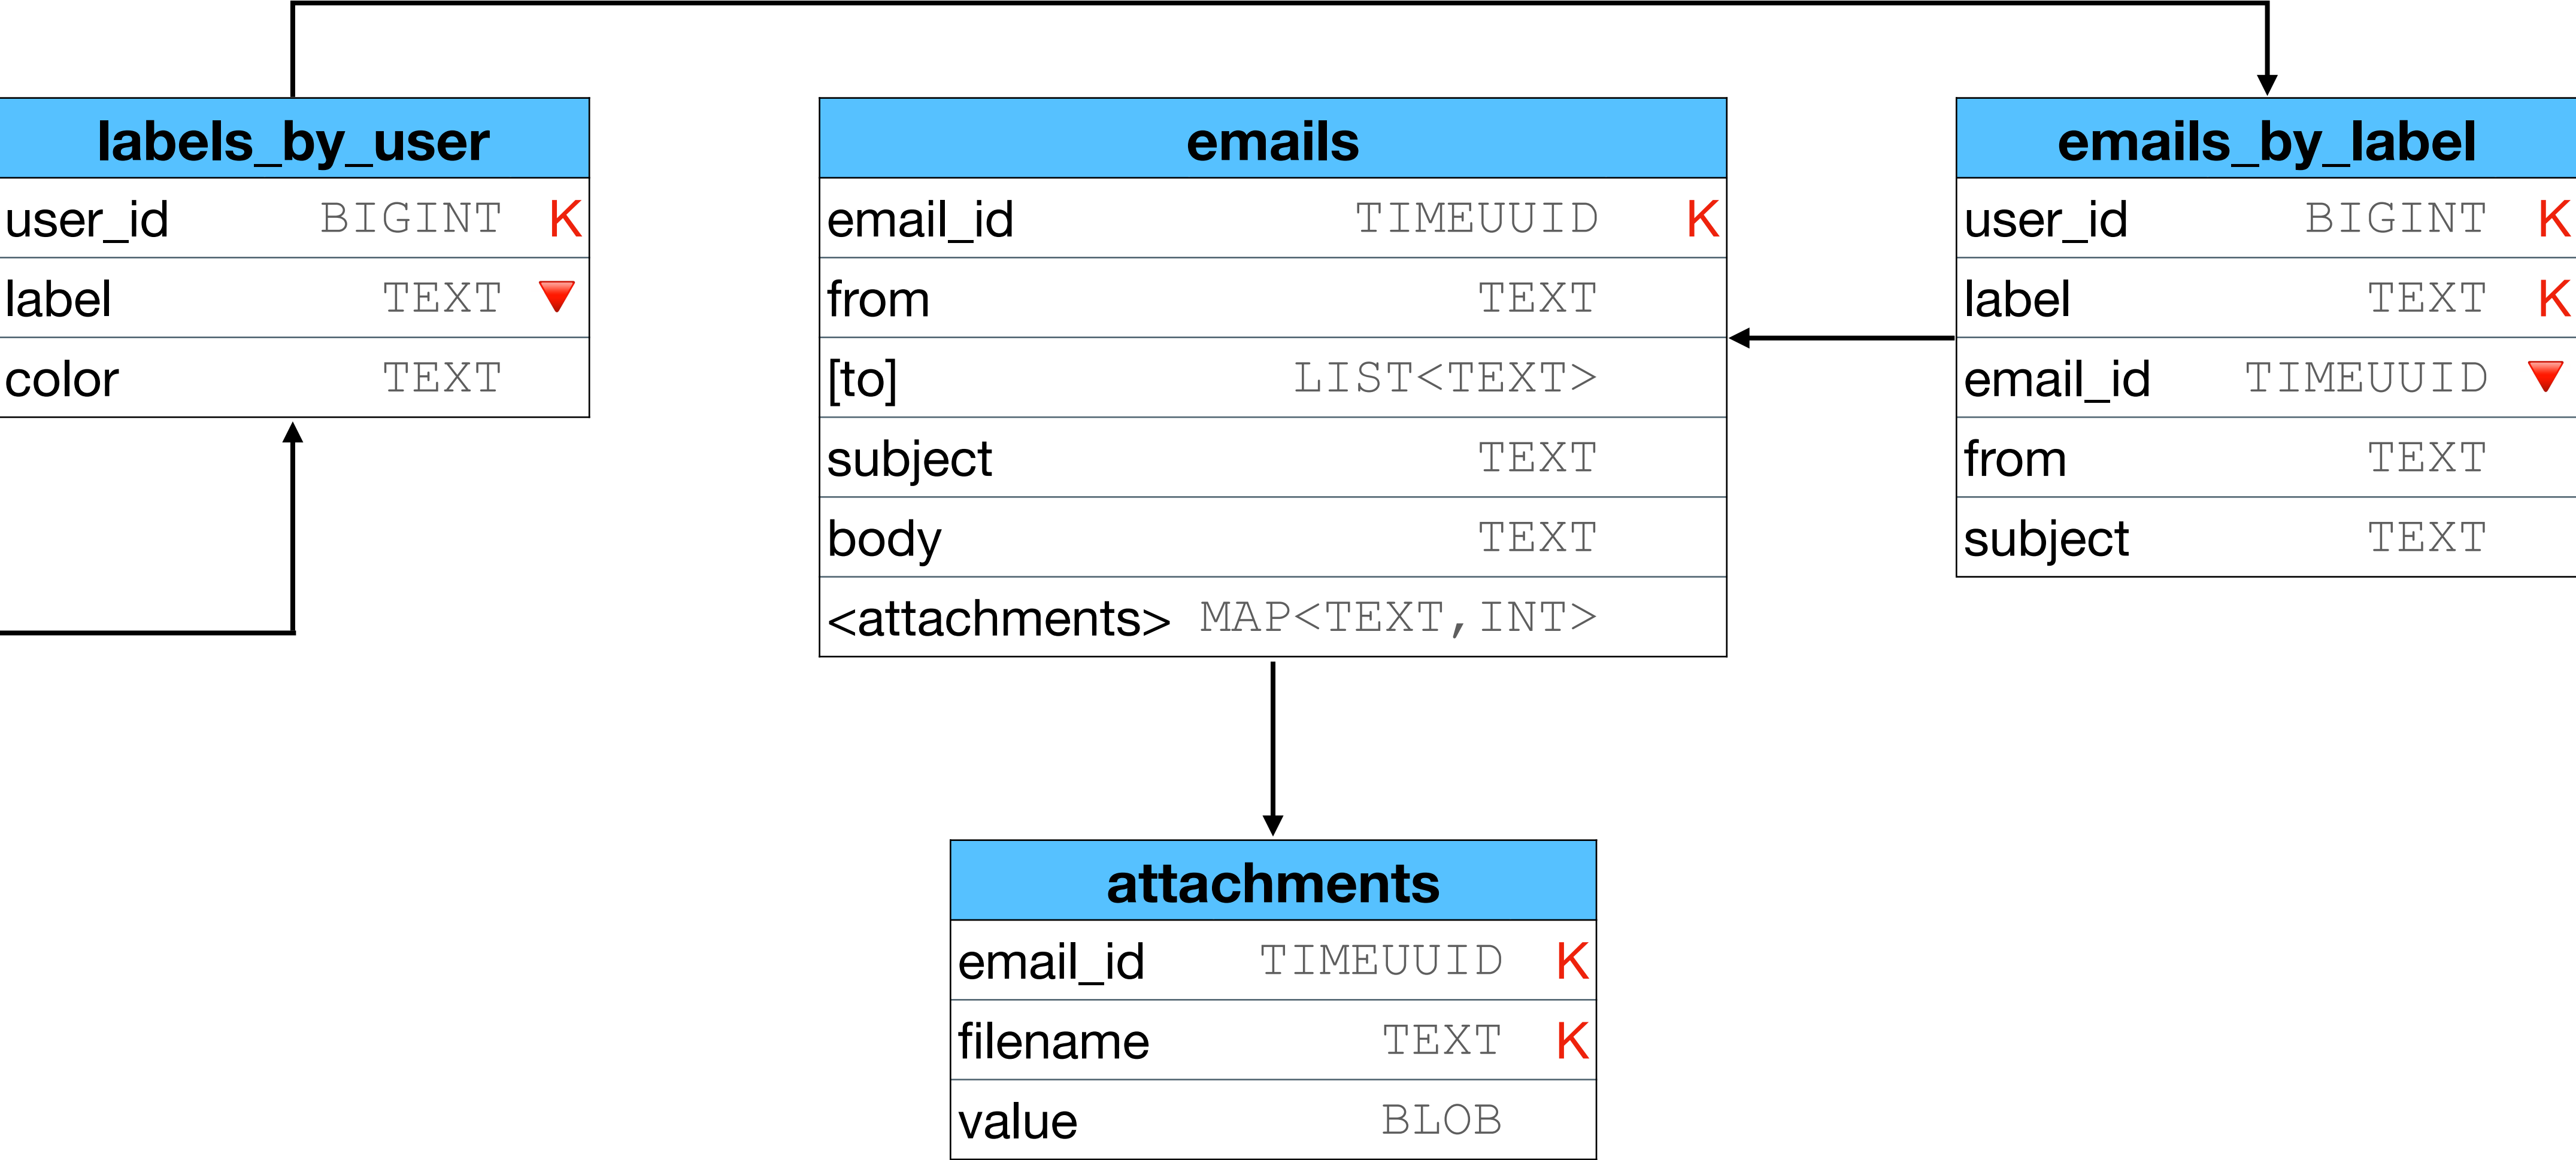

Gmail

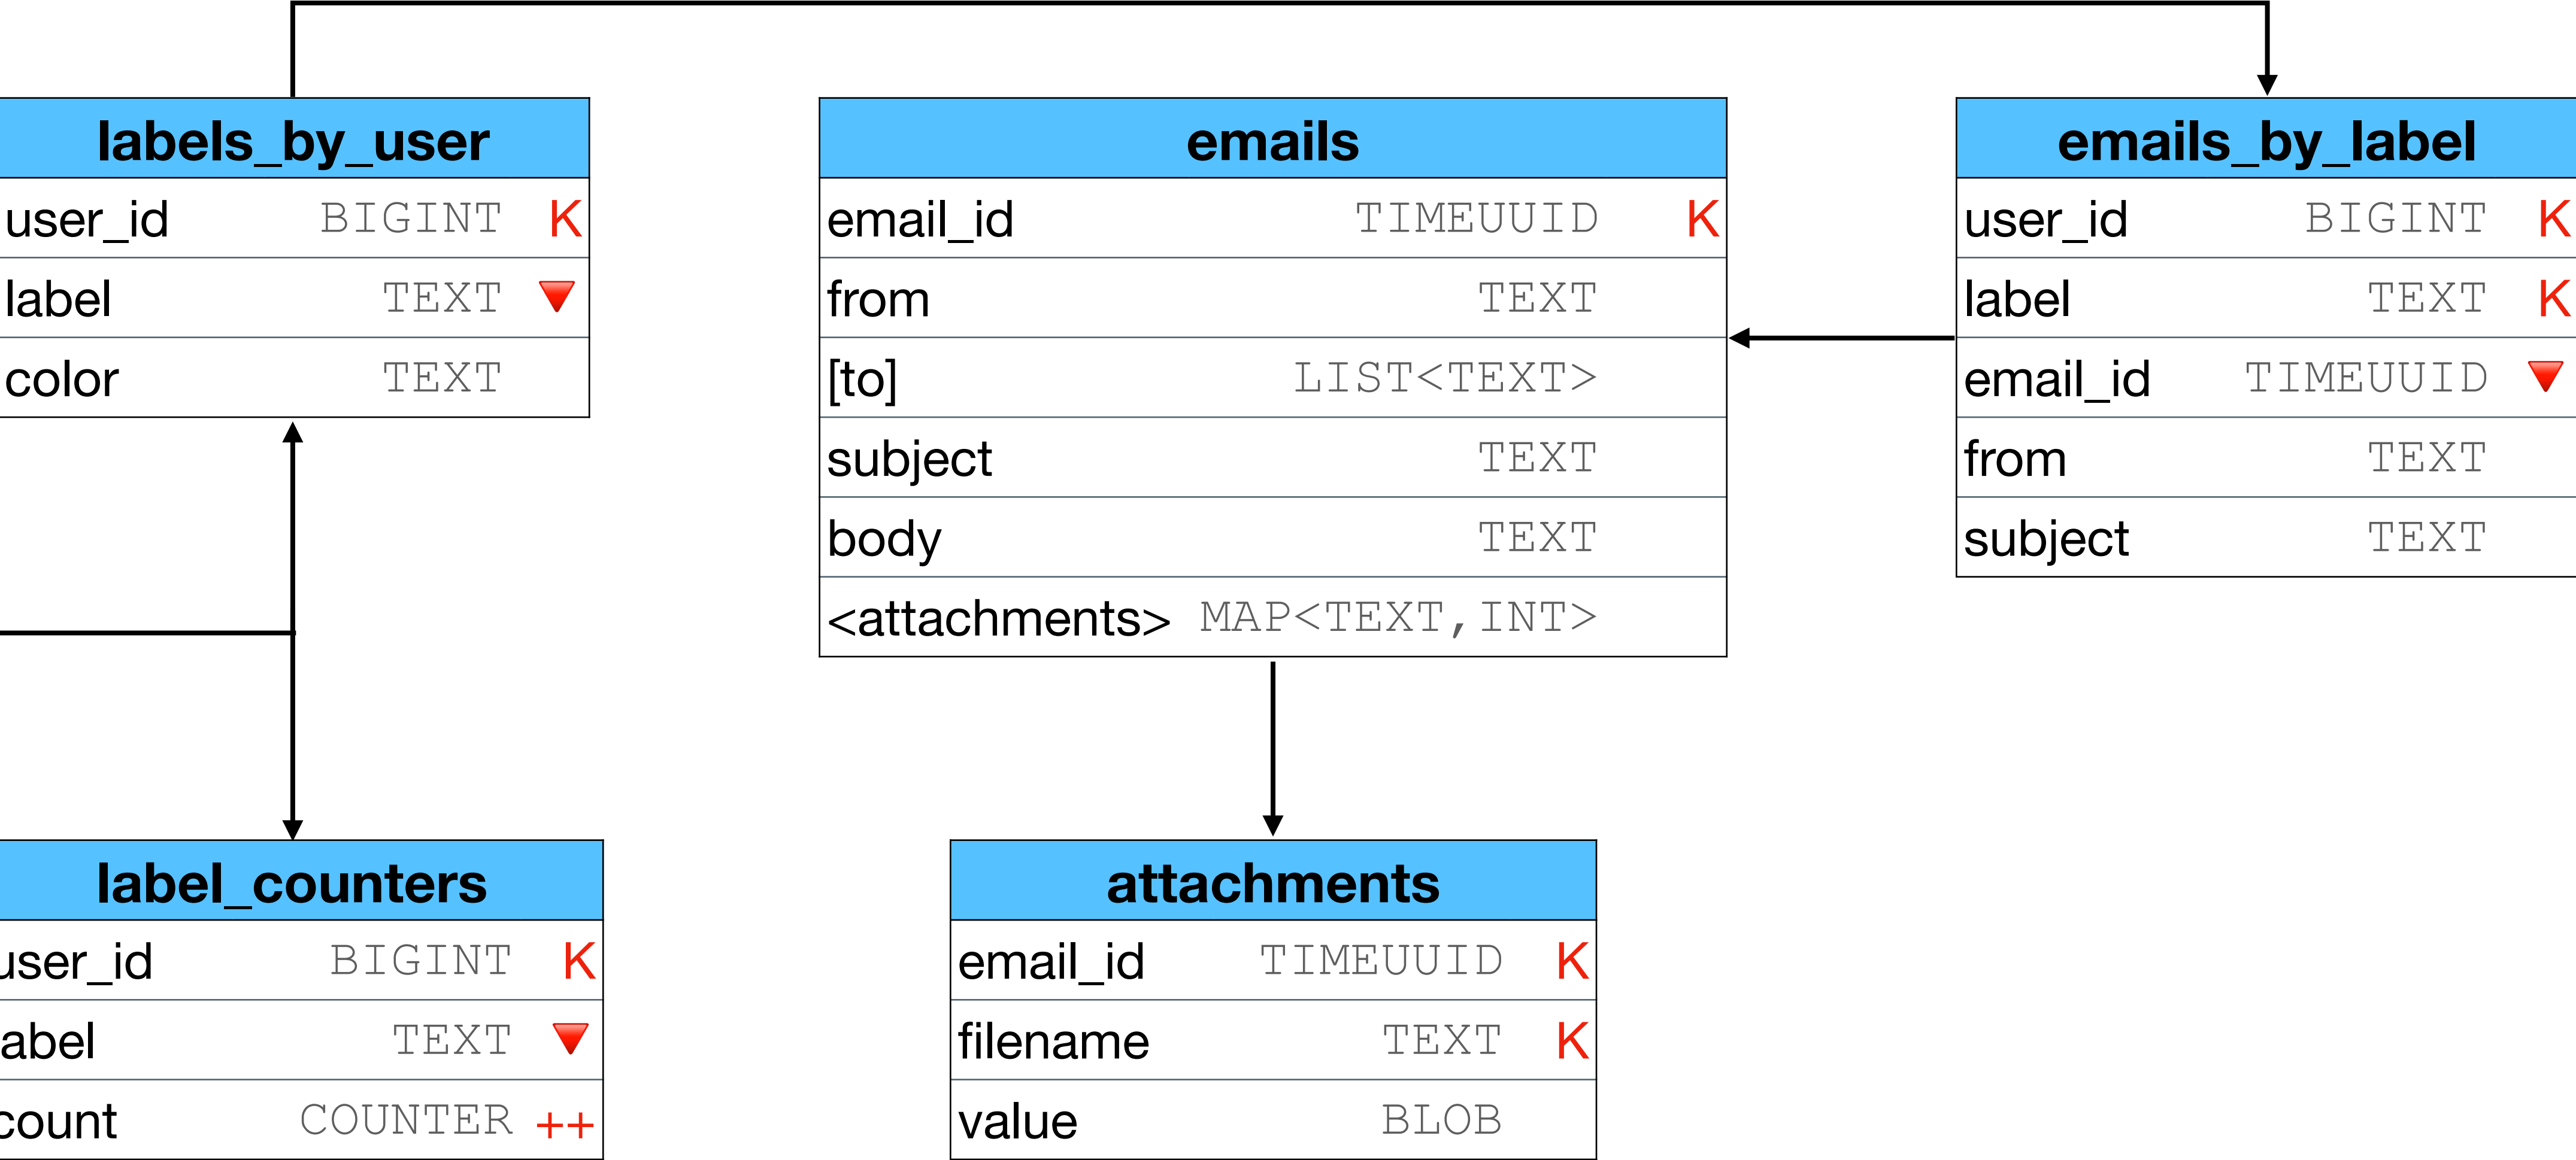

Gmail

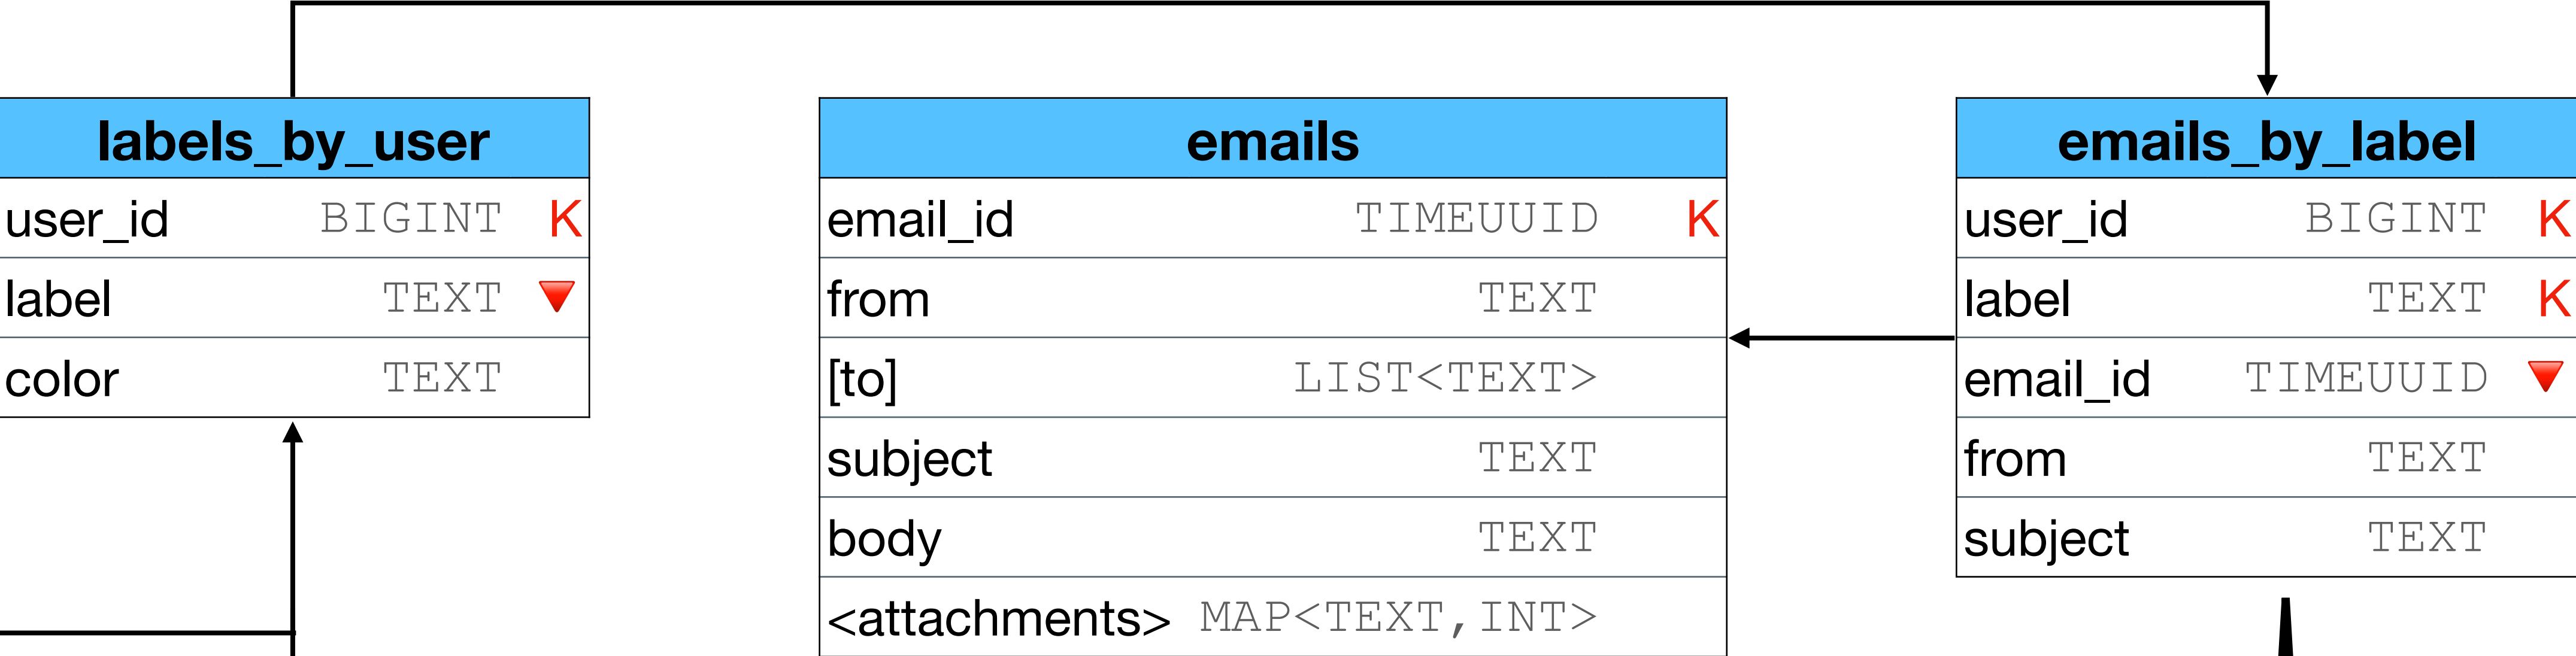

If we remove a label from an email we create a tombstone

Unlikely that a user will manually remove 100k emails

Range removal only creates 1 tombstone

Instagram

Requirements (basic)

- Follow users
- Post
- Like, comment

*example

Instagram

posts		
post_id	TIMEUUID	K
user_id	BIGINT	
[pictures]	LIST<TEXT>	
body	TEXT	
{tags}	SET<text>	

Instagram

posts		
post_id	TIMEUUID	K
user_id	BIGINT	
[pictures]	LIST<TEXT>	
body	TEXT	
{tags}	SET<text>	



pictures		
post_id	TIMEUUID	K
filename	TEXT	K
value	BLOB	

Instagram


post_comments		
post_id	TIMEUUID	K
comment_id	TIMEUUID	▼
user_id	BIGINT	
comment	TEXT	

posts		
post_id	TIMEUUID	K
user_id	BIGINT	
[pictures]	LIST<TEXT>	
body	TEXT	
{tags}	SET<text>	

pictures		
post_id	TIMEUUID	K
filename	TEXT	K
value	BLOB	



Instagram

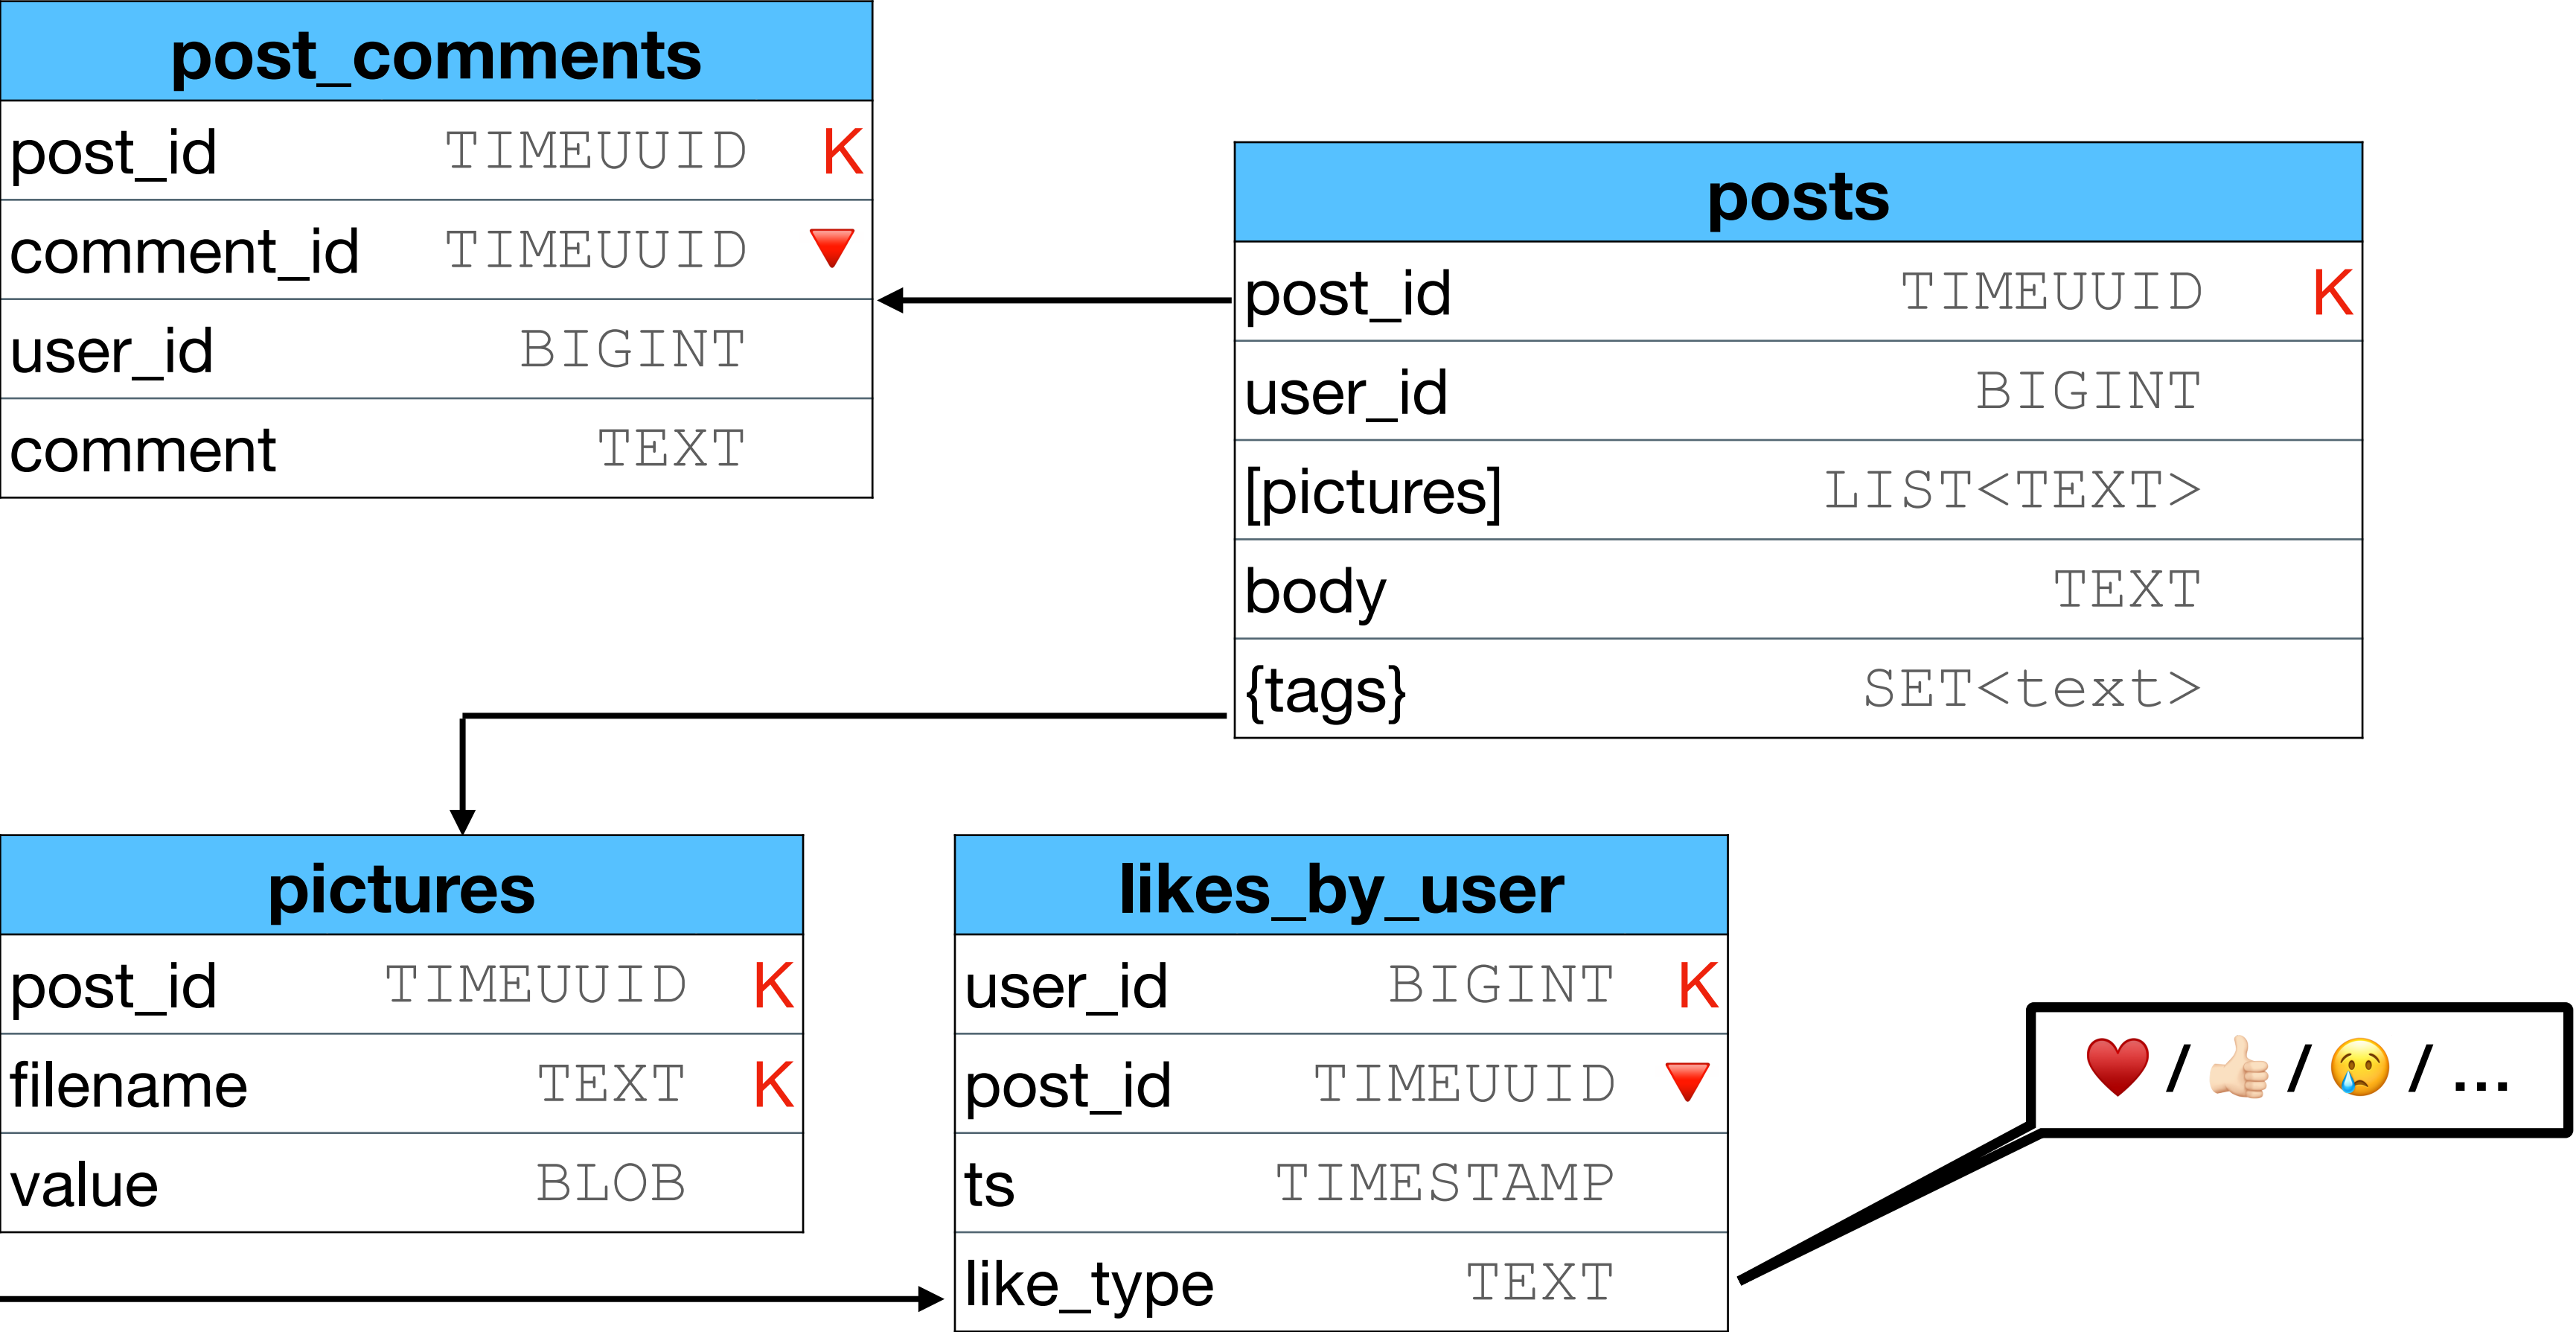

Instagram

post_comments		
post_id	TIMEUUID	K
comment_id	TIMEUUID	▼
user_id	BIGINT	
comment	TEXT	

posts		
post_id	TIMEUUID	K
user_id	BIGINT	
[pictures]	LIST<TEXT>	
body	TEXT	
{tags}	SET<text>	

pictures		
post_id	TIMEUUID	K
filename	TEXT	K
value	BLOB	

likes_by_user		
user_id	BIGINT	K
post_id	TIMEUUID	▼
ts	TIMESTAMP	
like_type	TEXT	

likes_by_post		
post_id	TIMEUUID	K
partition	BIGINT	K
user_id	BIGINT	▼
ts	TIMESTAMP	
like_type	TEXT	

likes_by_post_partitions		
post_id	TIMEUUID	K
partition_total	INT	

“normal” users —>
partition = -1

“popular” users —>
partition = user_id % 100

Instagram

post_comments		
post_id	TIMEUUID	K
comment_id	TIMEUUID	▼
user_id	BIGINT	
comment	TEXT	

posts		
post_id	TIMEUUID	
user_id	BIGINT	
[pictures]	LIST<TEXT>	
body	TEXT	
{tags}	SET<TEXT>	

Assume the time is 2021/12/22 14:54:34:3233

Round the ts **before** you insert the data

- By year use 2021/01/01 00:00:00:0000
- By month use 2021/12/01 00:00:00:0000
- By day use 2021/12/22 00:00:00:0000
- By hour use 2021/12/22 14:00:00:0000
- By minute use 2021/12/22 14:54:00:0000
- ...
- * use GMT=0 to avoid timezones / daylight

pictures		
post_id	TIMEUUID	K
filename	TEXT	K
value	BLOB	

likes_by_user		
user_id	BIGINT	K
post_id	TIMEUUID	▼
ts	TIMESTAMP	
like_type	TEXT	

likes_by_post		
post_id	TIMEUUID	K
partition	BIGINT	K
user_id	BIGINT	▼
ts	TIMESTAMP	
like_type	TEXT	

likes_counter		
post_id	TIMEUUID	K
ts	TIMESTAMP	▼
like_type	TEXT	▼
count	COUNTER	++

likes_by_post_partitions		
post_id	TIMEUUID	K
partition_total	INT	

Instagram

post_comments			
post_id	TIMEUUID	K	
comment_id	TIMEUUID		▼
user_id	BIGINT		
comment	TEXT		

post_id	TIMEUUID	K	
user_id	BIGINT		
[pictures]	LIST<TEXT>		
body	TEXT		
{tags}	SET<text>		

same logic as likes_by_post
“normal” users —>
partition = -1

“popular” users —>
partition = user_id % 100

follows_by_followed_partitions			
followed_user_id	BIGINT	K	
parition_total	INT		

follows_by_followed			
followed_user_id	BIGINT	K	
parition	BIGINT	K	
user_id	BIGINT		▼
ts	TIMESTAMP		

pictures			
post_id	TIMEUUID	K	
filename	TEXT	K	
value	BLOB		

likes_by_user			
user_id	BIGINT	K	
post_id	TIMEUUID		▼
ts	TIMESTAMP		
like_type	TEXT		

likes_by_post			
post_id	TIMEUUID	K	
partition	BIGINT	K	
user_id	BIGINT		▼
ts	TIMESTAMP		
like_type	TEXT		

likes_counter			
post_id	TIMEUUID	K	
ts	TIMESTAMP		▼
like_type	TEXT		▼
count	COUNTER		++

likes_by_post_partitions			
post_id	TIMEUUID	K	
partition_total	INT		

Instagram

post_comments			
post_id	TIMEUUID	K	
comment_id	TIMEUUID	▼	
user_id	BIGINT		
comment	TEXT		

follows_by_user			
user_id	BIGINT	K	
followed_user_id	BIGINT	▼	
ts	TIMESTAMP		

follows_by_followed_partitions			
followed_user_id	BIGINT	K	
partition_total	INT		

posts			
post_id	TIMEUUID	K	
user_id	BIGINT		
[pictures]	LIST<TEXT>		
body	TEXT		
{tags}	SET<text>		

follows_by_followed			
followed_user_id	BIGINT	K	
partition	BIGINT	K	
user_id	BIGINT	▼	
ts	TIMESTAMP		

pictures			
post_id	TIMEUUID	K	
filename	TEXT	K	
value	BLOB		

likes_by_user			
user_id	BIGINT	K	
post_id	TIMEUUID	▼	
ts	TIMESTAMP		
like_type	TEXT		

likes_by_post			
post_id	TIMEUUID	K	
partition	BIGINT	K	
user_id	BIGINT	▼	
ts	TIMESTAMP		
like_type	TEXT		

likes_counter			
post_id	TIMEUUID	K	
ts	TIMESTAMP	▼	
like_type	TEXT	▼	
count	COUNTER	++	

likes_by_post_partitions			
post_id	TIMEUUID	K	
partition_total	INT		

Instagram

post_comments			
post_id	TIMEUUID	K	
comment_id	TIMEUUID	▼	
user_id	BIGINT		
comment	TEXT		

follows_by_user			
user_id	BIGINT	K	
followed_user_id	BIGINT	▼	
ts	TIMESTAMP		

follows_by_followed_partitions			
followed_user_id	BIGINT	K	
partition_total	INT		

posts			
-------	--	--	--

HW - add posts by user

follows_by_followed			
followed_user_id	BIGINT	K	
partition	BIGINT	K	
user_id	BIGINT	▼	
ts	TIMESTAMP		

pictures			
post_id	TIMEUUID	K	
filename	TEXT	K	
value	BLOB		

likes_by_user			
user_id	BIGINT	K	
post_id	TIMEUUID	▼	
ts	TIMESTAMP		
like_type	TEXT		

likes_by_user_partitions			
partition	BIGINT	K	
user_id	BIGINT	▼	
ts	TIMESTAMP		
like_type	TEXT		

likes_counter			
post_id	TIMEUUID	K	
ts	TIMESTAMP	▼	
like_type	TEXT	▼	
count	COUNTER	++	

likes_by_post_partitions			
post_id	TIMEUUID	K	
partition_total	INT		